


LOAD CAPACITY UNDER EHSU SPREADER

MAX. TILLAT VINDHASTIGHET

MAX. ALLOWED WINDSPEED 20m/s = 72km/h

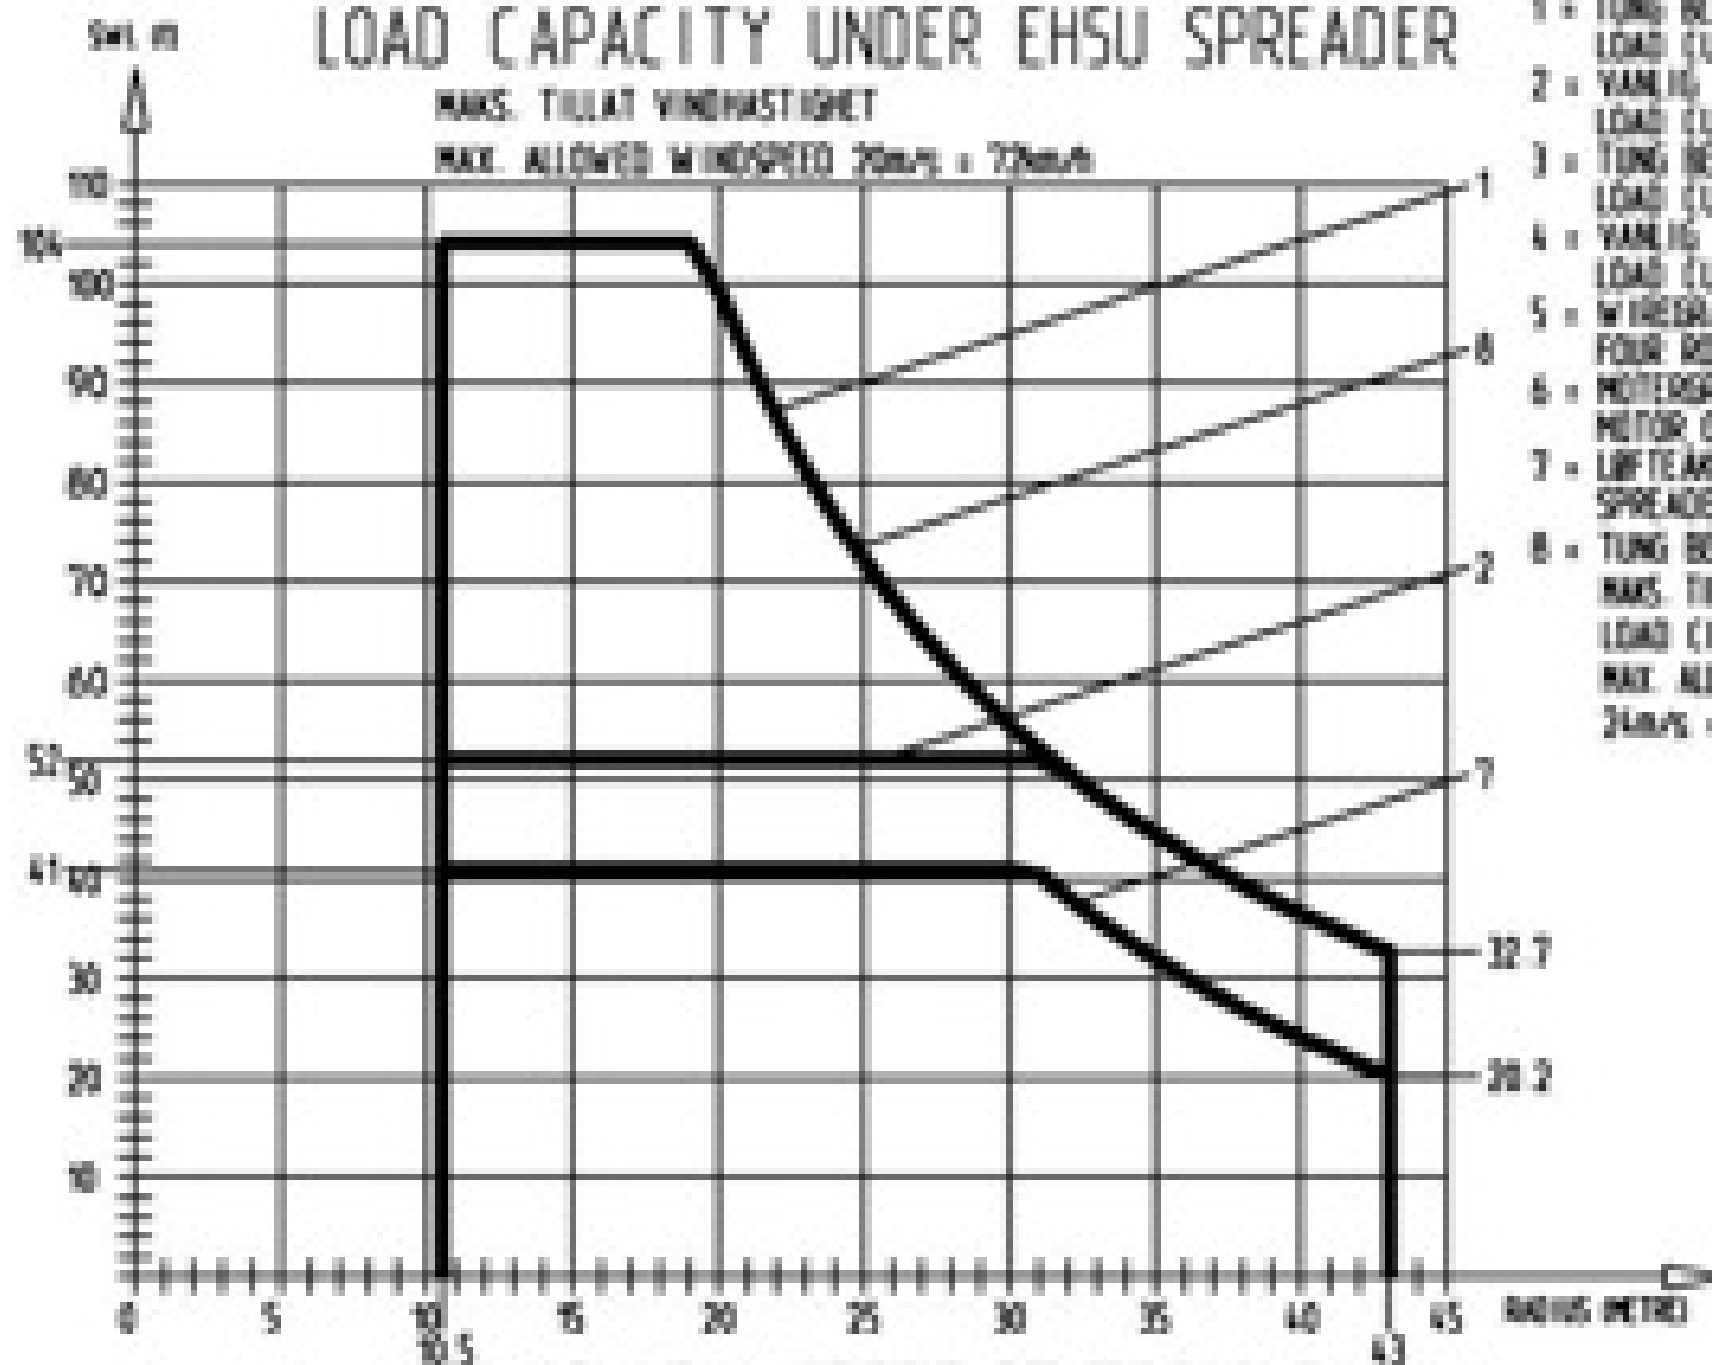

- 1 = TUNG BELASTINGSCURVE 75%
LOAD CURVE 75% HL
- 2 = VANIJG BELASTINGSCURVE 75%
LOAD CURVE 75% HL
- 3 = TUNG BELASTINGSCURVE 60%
LOAD CURVE 60% HL
- 4 = VANIJG BELASTINGSCURVE 60%
LOAD CURVE 60% HL
- 5 = WIREGRASS MED 4 WIER
FOUR ROPE GRAB
- 6 = MOTORGRAB
MOTOR GRAB
- 7 = LIFT-AR
SPREADER
- 8 = TUNG BELASTINGSCURVE 75%
MAX. TILLAT VINDHASTIGHET 20m/s
LOAD CURVE 75% HL
MAX. ALLOWED WINDSPEED 20m/s
20m/s = 72km/h